

Graf Platin® Rainwater Tanks

The new generation of Platin low-profile underground rainwater tanks makes it easy for the homeowner to install

The Platin® Low Profile Underground Tank:

The lineup consists of four low-profile tanks ranging from 400 gallons to 2,000 gallons. The ultra-high strength design of the Platin makes it groundwater stable up to the tank's shoulder and, when fitted with the appropriate lid, is safe for vehicle traffic. The Platin tank is guaranteed not to collapse when empty when installed per the manufacturer's specifications.




Platin Tank Features:

- 15 Year manufacturer's warranty
- Minimal installation depth
- Suitable for vehicle loading (when combined with the cast iron lid option)
- Groundwater stable to the tank shoulder
- Convenient 26" manway opening
- Variable installation depth with double-sealed telescopic riser
- Attractive locking green lid
- Internal pre-filtration option
- Easy to transport and install
- Ultra-high strength materials and design

Internal Filter Package Option:

Specially designed for rainwater harvesting, the Graf Minimax-Pro® internal self-cleaning filter handles debris from roof areas up to 3,750 sq. ft.

- Greatly simplified installation
- Only one manway and lid in the yard
- Provides over 95% water yield
- Self-cleaning
- Very low maintenance

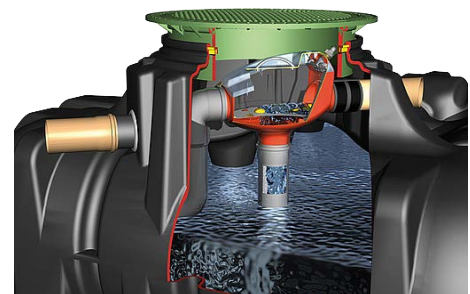


Graf Platin Tank Ease of Installation:



- Minimum installation depth greatly reduces installation time and cost, while modular components and integrated filter technology make the system easy to assemble.
- Existing irrigation systems can be connected to the automatically controlled pump which starts pumping whenever a zone is activated.
- Water can be delivered using an internal pump connection and/or by the integrated hose connection in the tank lid. Hose connection in the tank lid snaps shut while not in use.

Platin Tank Dimensions:

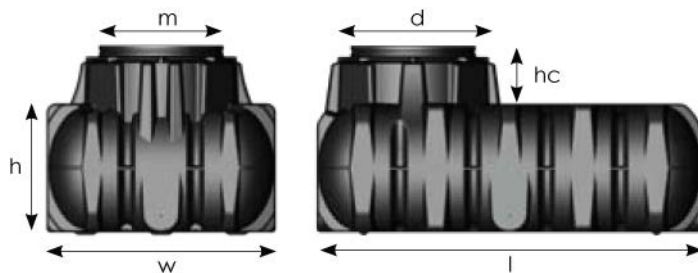

Tank	400 US Gallons	800 US Gallons	1350 US Gallons	2000 US Gallons
Part No.	390000	390001	390002	390005
Weight (approx.)	175 lb.	375 lb.	530 lb.	795 lb.
Length [l]	83"	96"	114"	142"
Width [w]	49"	83"	91"	89"
Height of tank shoulder [h]	28"	29"	37"	49"
Height of dome collar [hc]	12.5"	12.5"	12.5"	12.5"
Ø Manway opening [m]	26"	26"	26"	26"
Ø Tank dome [d]	31.5"	31.5"	31.5"	31.5"