

NOTE: This drawing is for illustrative purposes only. Actual systems and designs may vary. Always check with local building codes as they will apply. Electrical work to be performed by licensed professional. Points of use shall be labeled as: "Non Potable water, Do Not Drink!"


NOTE #2: Pump plumbing should be run with schedule 40 or better with thread by slip adapters at pump outlet, pump control and bulkhead fittings. A union is advisable for easy removal.

NOTE #3: Pump should be located in a protected area or under a pump cover. Use poly hose barb and hose clamps for connection of suction hose and floating extractor at bulkhead fitting installed in tank side wall.



NOTE #4: Tank must be placed on level surface. Compacted soil, gravel or concrete is best. Locate as close to inlet of gutter system as possible.

NOTE #5: Graf Herkules Tanks can be modified by adding bulkhead fittings and multi-tite gaskets where necessary. Use a hole saw of the correct size for the fitting being installed.

USER'S Responsibility
 Rainwater supplied by RainHarvest Systems is NON-Potable water. Warning do not drink water supplied from RainHarvest Systems rainwater systems and related equipment. We will be happy to offer suggestions on the use of our various products either by way of printed material or through direct contact with RainHarvest Systems team members. However, since we have no control over the use of our products once they are shipped, NO WARRANTY WEATHER OF MERCHANTABILITY, FITNESS FOR PURPOSE, OR OTHERWISE is made beyond the repair, replacement, or refund of purchase price at the sole discretion of RainHarvest Systems. Users shall determine the suitability of the product for the intended application before using, and the users assume all risk and liability whatsoever in connection therewith, regardless of any team members suggestions or statements as to the application or construction. In no event of the purchase price of the product. Consult local building codes for the system use.

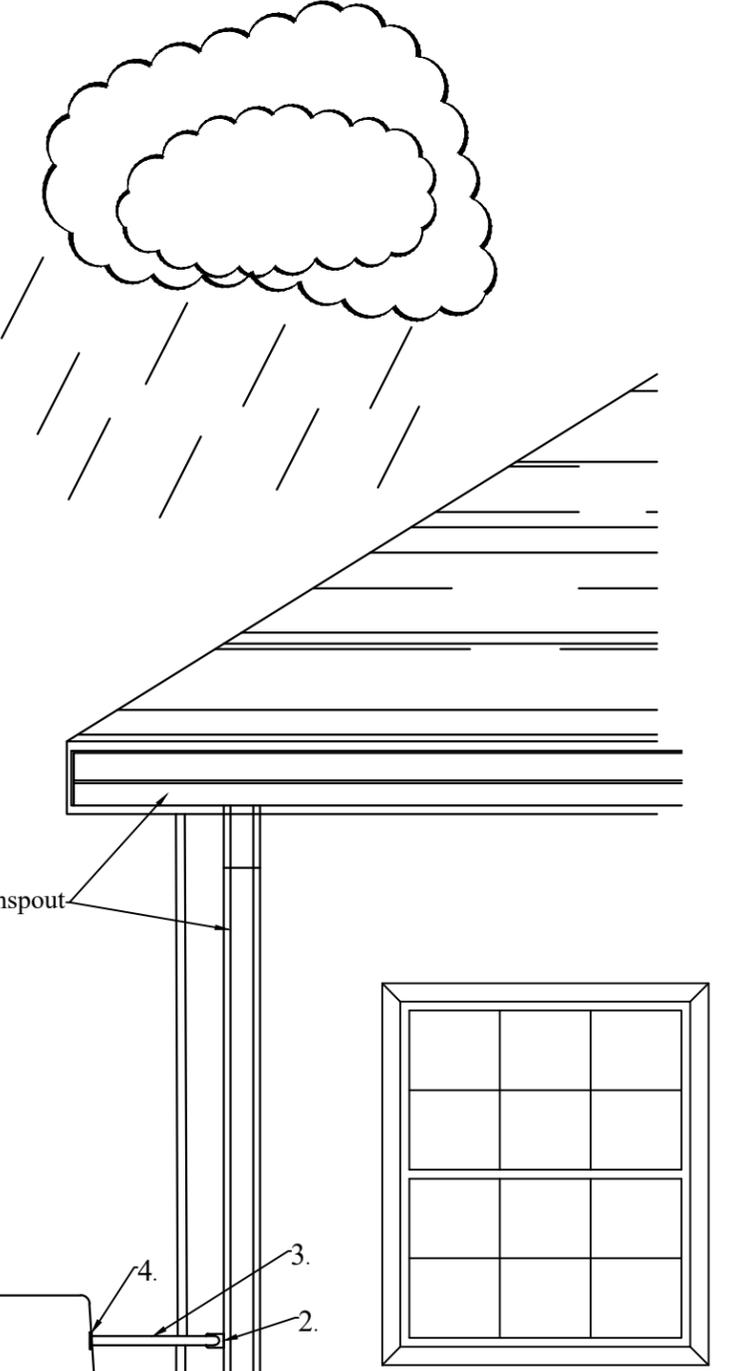

RainFlo 430-AG		
#	Description	Qty.
1	Graf 430 gallon Herkules water tank Graf 430 Gallon Herkules	1
2	Graf Quattro Downspout Filter (See Installation Instructions)	1
3	1" diameter x 12" Long Hose	1
4	Rubber Gasket	1
5	RainFlo 1/2 Horsepower External Pump	1
6	RainFlo 1 Inch Water Meter Install using PVC Adapters (Not Included)	1
7	Pump Connection Hardware Kit (Includes bulkhead fitting, 2 hose barbs, 2 hose clamps and 5' of hose) *SEE NOTE 6* and Detail	1
8	Power Supply 115vac	
9	Output to Usage, Typically Sch 40 PVC Pipe and Fittings supplied by User (Not Included)	
10	Compacted Soil or Concrete	
11	Tank Assembly Clips, See Herkules Installation Instructions	

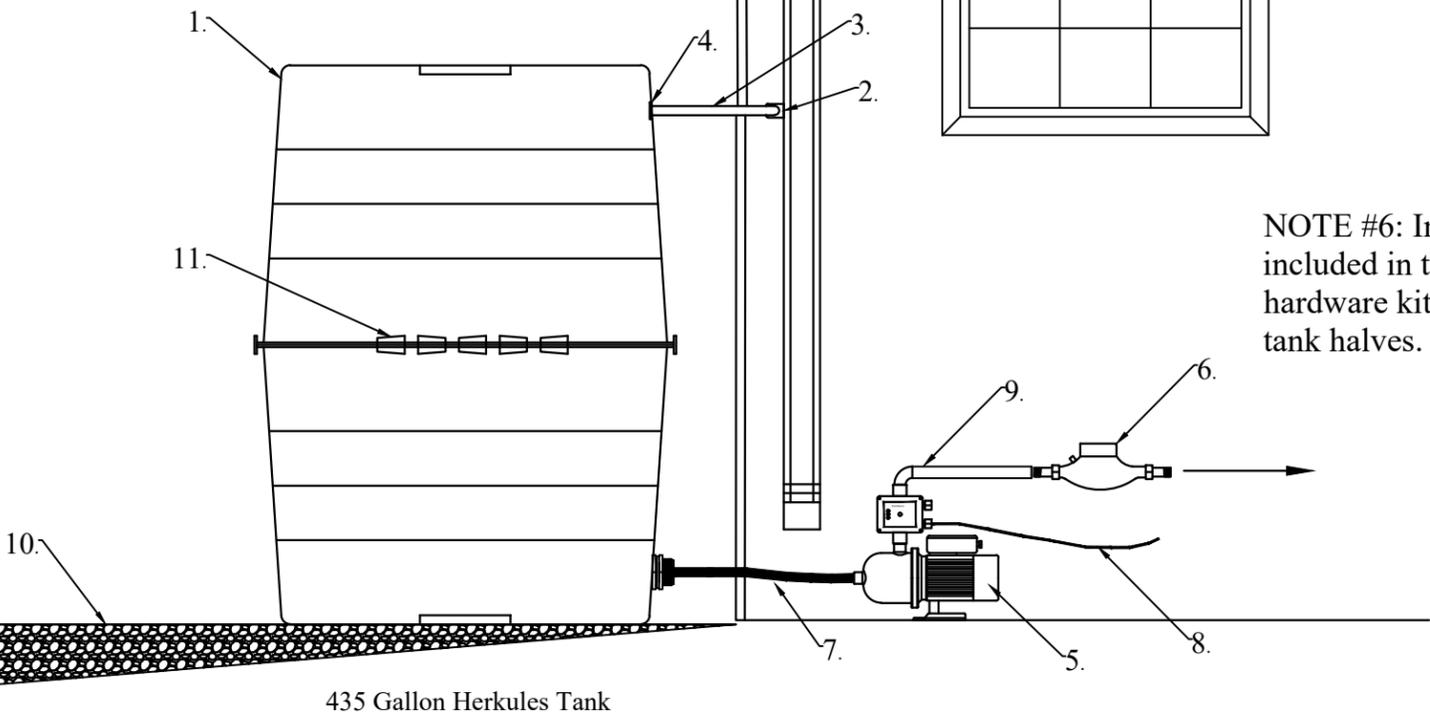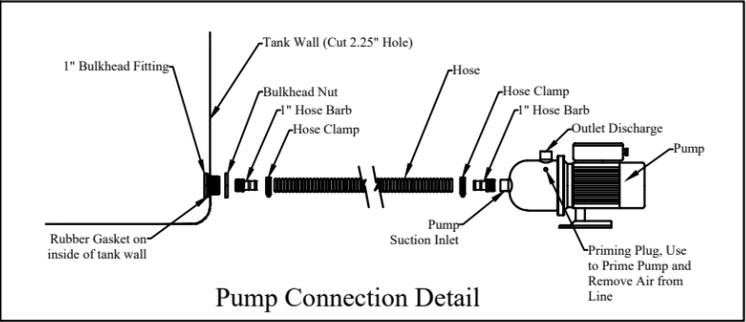

NOTE #6: Install the bulkhead fitting included in the pump connection hardware kit before assembling the tank halves.

NOTE: This drawing is for illustrative purposes only. Actual systems and designs may vary. Always check with local building codes as they will apply. Electrical work to be performed by licensed professional. Points of use shall be labeled as: "Non Potable water, Do Not Drink!"

CHK BY:	APP BY:	DRAWN BY:	QUOTE NO.:	SH.#:
		CMG		1 OF 1
RainFlo 430 AG Rainwater Collection System				
		RainHarvest Systems LLC. 4475 Alicia Lane Cumming, GA 30028 Tel: 770-889-2533 Fax: 770-889-2577		